


2.4GHz 1005 Low Pass Filter: LLP1005R2400L201

Applications:

WLAN, 802.11b/g, Bluetooth, ISM Band...

Features

SMD, high reliability, ultra-Impact...



Part number

LLP 1005 R 2400 L2 01
(1) (2) (3) (4) (5) (6)



(1) Product code	LTCC-LPF
(2) Size Code	1.0x0.5mm
(3) Packing	Tape and reel
(4) Frequency	2.4GHz
(5) Series	L2
(6) Type	01

Electrical Specification

Pass Band	2400~2500MHz
Impedance	50 Ohm
Insertion Loss	0.5dB max. @ 25°C
Attenuation	30dB min. @ 4800 ~ 5000 MHz 30dB min. @ 7200 ~ 7500 MHz
VSWR	2.0 max.
Operating Temperature	-40~+85°C

The specification is defined on EVB.

Dimension and Terminal Configuration


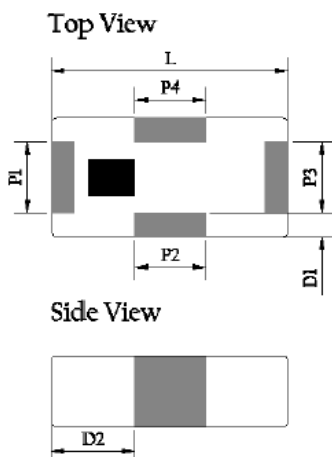


Dimension (mm)	
L	1.00±0.10
W	0.50±0.10
T	0.35±0.10
P1	0.30±0.15
P2	0.30±0.15
P3	0.30±0.15
P4	0.30±0.15
D1	0.10±0.10
D2	0.35±0.15


No.	Terminal Name
P1	Input
P2	GND
P3	Output
P4	GND

2.4GHz 1005 Low Pass Filter: LLP1005R2400L201

Evaluation Board Reference

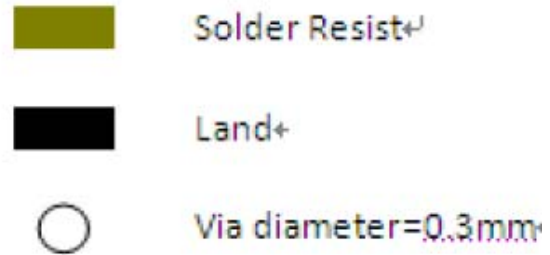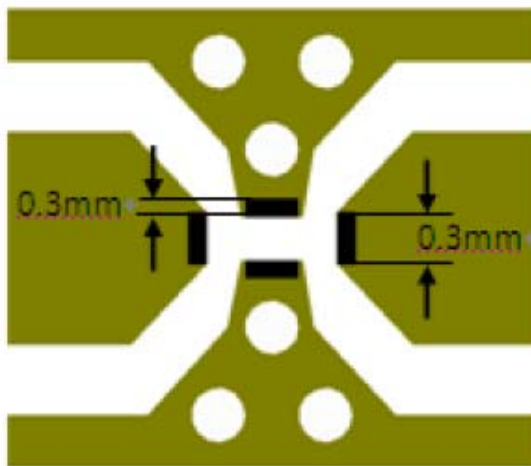

Electrical Characteristics

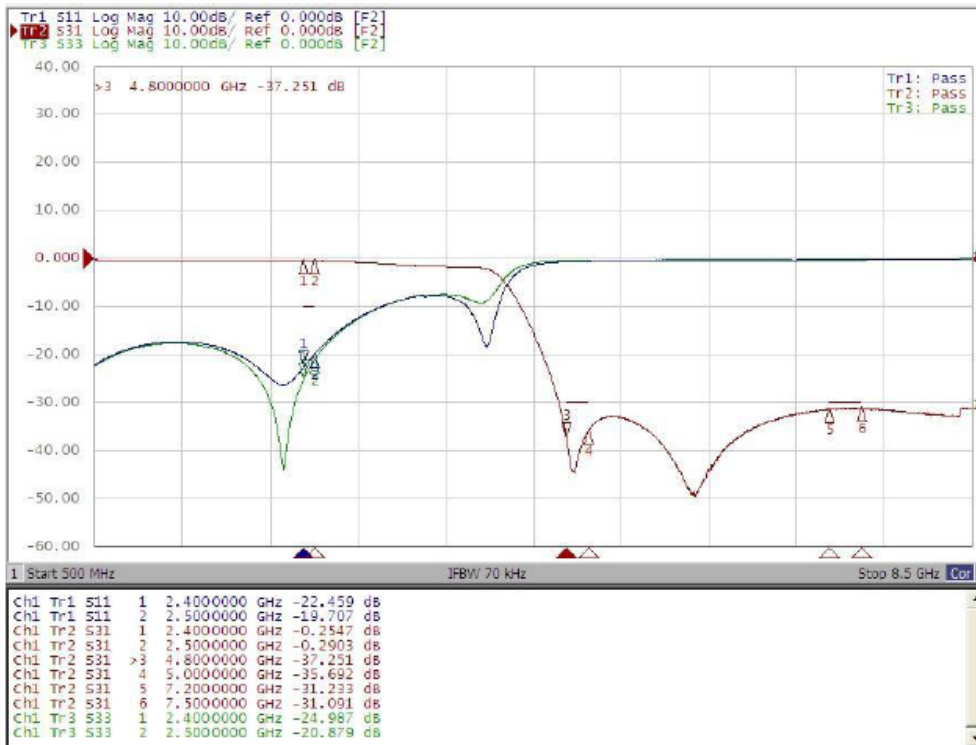


Measured on Agilent E5071C
Network Analyzer
Input port : Port 1 (Return loss :
S11)
Output port : Port 3 (Return loss :
S33)
Insertion loss : S31

2.4GHz 1005 Low Pass Filter: LLP1005R2400L201

Taping Specifications


Reel and Taping Specification

Reel Specification

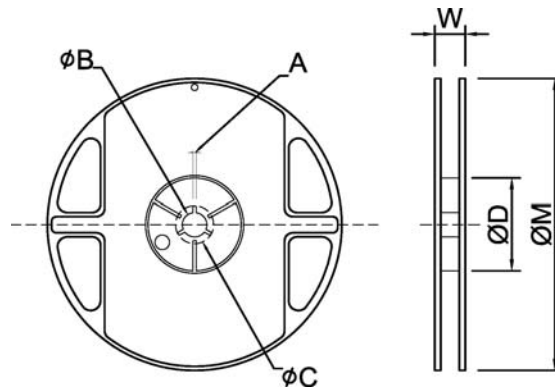

TYPE	SIZE		A	ψB	ψC	ψD	W	ψM
1005	7"	10K/Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0

Tapping Specification

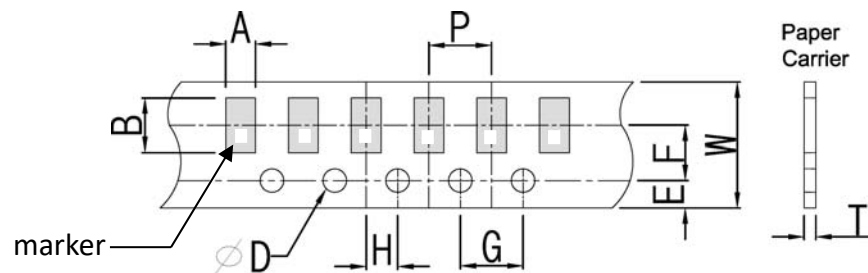


Packaging	Type	A	B	W	E	F	G	H	T	ϕD	P
Paper Type	1005	1.00±0.20	1.55±0.20	8.0±0.20	1.75±0.10	3.3±0.05	4.0±0.10	2.0±0.05	0.75±0.10	1.50 +0.10 -0	4.0±0.1

2.4GHz 1005 Low Pass Filter: LLP1005R2400L201

Recommended Reflow Profile

Pb free solder

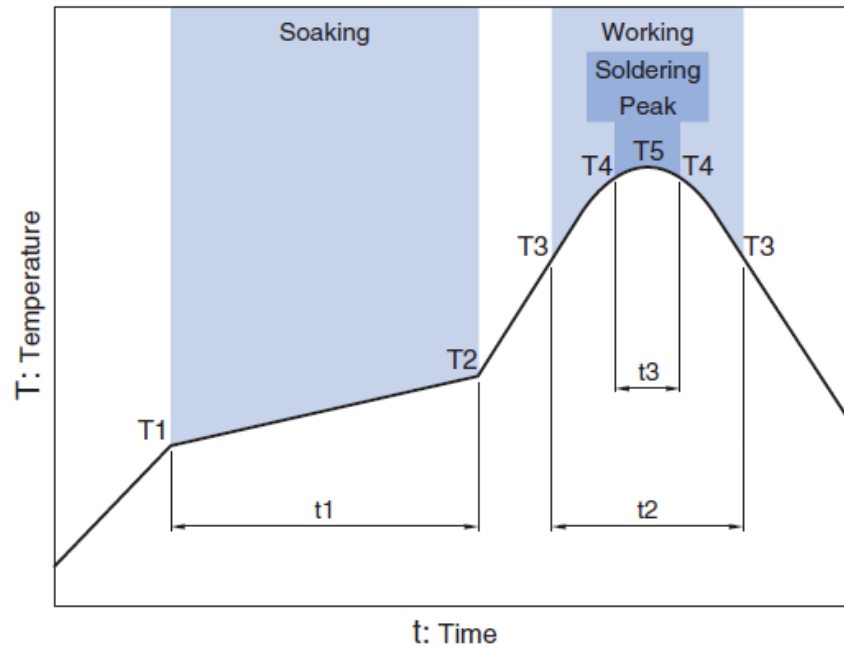

Soaking			Working		Soldering		Peak
Temp.		Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3	T5
150°C	180°C	60 to 120sec	230°C	more than 30sec	247 to 253°C	within 10sec	260°C Max.

Revision History

Version	Date	Description
Ver.01	Jul.2023	New issue.